



XL LOW-PROFILE HDG: PAVER STYLE



FEATURES

- Access panel for easy access to motor
- Swing out outriggers and bent d-rings
- Work light in upper deck
- Toolbox in front of main deck for storage
- All air tanks are located in the wheel area
- Bucket well and open boom trough
- Tapered front beam design



PAVING EQUIPMENT FRIENDLY

Tapered front beams offer the extremely low load angle of only 4 degrees, just what is needed for the paving industry.

The 42" flip ramps provide extra loading assistance. Load paving machines, rollers and much more with ease.


OPTIMUM STORAGE SOLUTIONS

A toolbox at the front of main deck provides a nice storage area for chains and other items, while the deep bucket well in the rear provides an area for an excavator bucket to ride safely without detaching the lower boom section. Two pairs of d-rings in the bucket well provide added tie down points.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

XL 110 HDG: PAVER STYLE SPECS

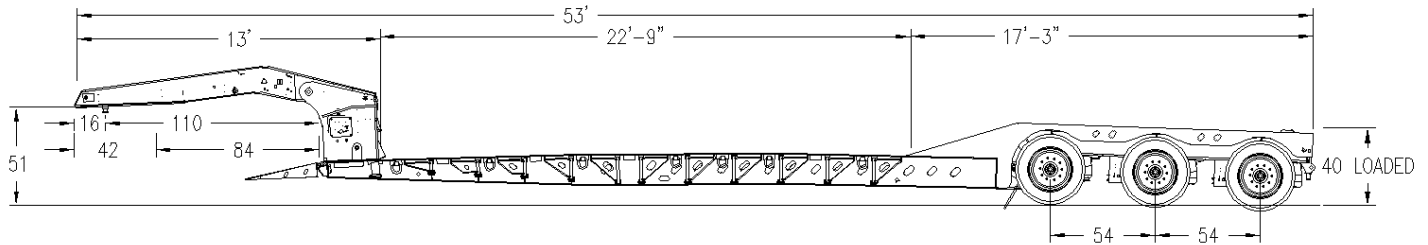

CAPACITY

capacity: 110,000 lb overall
concentrated: 110,000 lb in 12'

OVERALL LENGTH & WIDTH

overall length: 53'
overall width: 102"

GOOSENECK

13' low-profile style neck
with relief cut-out
51" 5th wheel height
5 position variable ride height
110" & 84" swing clearance
16" & 42" king pin setting
trilliant work light

GOOSENECK OPTIONS

13HP power unit, base of neck,
dual hydraulics
toolbox in rear of neck with
aluminum or steel lid
steel fenders on side of
gooseneck
aluminum fenders on side of
gooseneck
registration holder

MAIN DECK

22' 9" long
T-1 flange, 80K web
(4) 16" fabricated i-beams
paver style tapered beam design
22" loaded deck height
6" ground clearance
10" & 4" stubbed jr. i-beams on
alternating 12" centers
42" paver style front flip ramps
7 bent d-rings per side
1 3/8" Apitong decking - raised,
open center
toolbox in front of deck

4 flat d-rings in toolbox
13 chain drops per side
heavy-duty swing out outriggers
on 24" centers
heavy-duty flatback outriggers,
front and center
2 flag holders
bucket well at rear, plate on bottom
4 flat d-rings in bucket well
front ramp upper flange reinforcement

REAR DECK

14' long
32° transition to main deck
40" loaded deck height
bolster-style wheel area
2 chain drops on each bolster
open boom trough
2 flat d-rings on main beams at rear
2 flag holders
2 stake pockets in tail channel
for wide load sign
prep for 1 axle booster

SUSPENSION

25,000 lb air ride
raise and lower valve
manual ride height control
liquid filled air gauge

SUSPENSION OPTIONS

Air-Weigh digital scale

AXLES

(3) 25,000 lb nominal
54 1/2" axle spacing
air lift on 3rd axle
hub pilot, outboard drums
16 1/2" X 7" brakes
limit chains on all axles
spring brakes on 1 axle
ABS not required

AXLE OPTIONS

hubometer
dust shields
cat eye systems

WHEELS & TIRES

8.25 x 22.5 steel rims
255 / 70R / 22.5 tires

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
2 tail light package with
aluminum cover
2 clearance lights per side
1 mid-turn light per side
7 pole electric socket

PAINT

black, IH red, CAT yellow or white
air & electric done after paint

PAINT OPTIONS

custom paint colors
metallic paint colors

WARRANTY

5 year structural
3 year paint

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852