

THE XL PHANTOM: 80 POWER TAIL



- Foot hole and grab handle for access to upper deck
- 9-foot pop-up ramp from deck to neck
- · 25,000 lb tail lifting capacity
- · Work light at rear of neck
- 20,000-pound or 30,000-pound winch
- Aluminum control panel



XL80 PT V hy


EXCEPTIONAL TAIL DESIGN

The hydraulic tail is comprised of two sections – an 8-foot 8-inch platform ramp and a 60-inch flip tail. Both hinge points stay clean thanks to lug style hinges. The structural punch plate is made with one piece of steel, so no additional plate is required, and no dirt or debris accumulate.

HANDLES HARD-TO-LOAD EQUIPMENT

With high traction tread plate and a load angle of 10 degrees, the hydraulic tail is equipped to easily handle hard-to-load equipment such as manlifts, rollers, forklifts and paving equipment. The tail features a lifting capacity of 25,000 pounds for loads centered on the main platform.

DESIGNED FOR YOU. BUILT TO LAST.

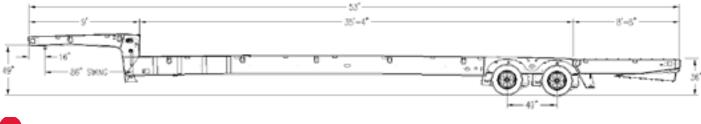

PHANTOM SPE

CAPACITY

capacity: 80,000 lb overall concentrated: 50,000 lb in 10'

OVERALL LENGTH & WIDTH

overall length: 48' or 53' overall width: 102"

GOOSENECK

9' long full-width 90° slope

16" king pin setting

86" swing clearance

49" 5th wheel height

steel tread plate decking

(2) d-rings per side

2 speed landing gear with handle on driver side

wet line hydraulics to run off truck hydraulic levers on driver side planetary drive 20,000 lb hydraulic winch with 100' of 9/16" cable

& air kick out

2 function wireless remote for winch

2 toolboxes with lids

9' long pop-up ramp, deck to neck integrated foot step and grab

handle, on both sides registration holder

GOOSENECK OPTIONS

13HP Honda power unit 30,000 lb winch bolt-on winch guard 10 function wireless remote

MAIN DECK

T-1 flange, 80k web 48' OAL: 30' 4" long 53' OAL: 35' 4" long 36" loaded deck height

13/8" Apitong decking - raised

steel tread plate decking

18" fabricated i-beams

10" & 8" jr. i-beam cross members on alternating 12" centers

5 d-rings per side

stake pockets and chain slots on alternating 24" centers, sides chain slots down on 48" centers,

center deck

TAIL SECTION

13' 8" hydraulic tail: 8' 8" platform 60" fold under flip tail automatic flip tail lock traction aids star traction plate decking 10 degree load angle

WHEELS & TIRES

 6.75×17.5 steel rims inside aluminum polished wheels outside 245 / 70R / 17.5 tires

SUSPENSION

25,000 lb air ride

AIR SYSTEM

air dump on all axles liquid filled air gauge

AXLES

(2) 25,000 lb nominal 49" axle spacing hub pilot, outboard drums 4S2M ABS spring brakes on 2 axles 12 1/4" x 7 1/2" brakes

LIGHTING

12V sealed Grote harness rubber mounted led lights 3 tail light package amber strobe as 3rd tail light 1 mid-turn signal per side (4) 3/4" clearance light per side 7 pole electrical socket Grote trilliant work light on neck

PAINT

air & electric done after paint

WARRANTY

5 year structural 3 year paint