XL 130 DOUBLE GOOSENECK EXPANDABLE



FEATURES

- 130,000 lb capacity
- Self-centering auto-align functionality
- 8″ loaded deck height
- 36″ lift hat boxes
- 4″ crossmembers
- 9′9″ overall height
- Sealed wiring harnesses
- Setup includes Jeep, DGX Trailer, and Steerable Dolly





SUPERIOR MANEUVERABILITY

Built to move more with greater control, maneuverability, and efficiency. The XL 130 DGX delivers maximum payload capacity, scalability, and superior maneuverability for today's most demanding heavy haul applications. Built with your heaviest loads in mind, the XL 130 DGX expands from 12 feet to 20 feet wide with forward-mounted neck gates to maximize well length and ensure smooth expansion.


CAPACITY WITHOUT COMPROMISE

The XL 130 DGX features an industry-leading 9-foot-9-inch overall height for optimal loading clearance. An ultra-low 8-inch loaded deck height pairs with reversible crossmembers adjustable every 3 inches for flexible load positioning. Front and rear 36 inch lift hat boxes add even more capability, while a robust redundant steer system ensures reliability you can trust on every job.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

XL 130 DGX TRAILER SPECS

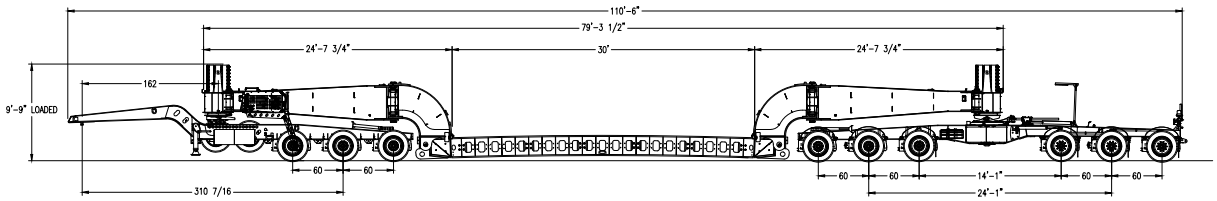

XL 130 DGX CAPACITY

Capacity: 130,000 lbs

OVERALL LENGTH & WIDTH

Overall length: 72′ 2″

Overall width: 120″

JEEP

27′ 10″ long

120″ wide

49″ 5th wheel height

(1) pair bent D-rings on gooseneck

(1) pair bent D-rings on rear deck

60″ axle spacing

(1) spare tire carrier curbside

¾″ LED clearance lights

Fabricated steel dunnage blocks

Foot step at rear

Black traction coating on bolt-on walkway covers

FRONT GOOSENECK

20′ 11″ long

16″ kingpin setting

207″ swing clearance

67″ 5th wheel height

Hydraulic hat box with 36″ lift

(2) expandable cross braces

Honda IGX SCU with remote start

8 function wireless remote for neck functions

Manual hydraulic controls for gooseneck operation on driver side

Flip down ladder on road side

(3) pairs flat D-rings on top flange

(1) pairs flat D-rings on bottom of base

MAIN DECK

30′ long hydraulic expandable deck from 12′ wide to 20′ wide

8″ loaded deck height

4″ wide fab expandable crossmembers

(2) 24″ I-beams

(1) flat D-ring on each corner

Shim storage

REAR GOOSENECK

20′ 11″ long

16″ kingpin setting

207″ swing clearance

50″ 5th wheel height

Hat box with 36″ travel dual position for cylinders

(2) expandable cross braces

(4) pairs flat D-rings on top flange

(2) pairs flat D-rings on rear of base

(2) pairs flat D-rings on top

DOLLY

32′ 11″ long

120″ wide

Load bolster hydraulically linked to steer axles

140° total load bolster rotation

Manual ride height control on front and rear axles

Park brake release valve

Remote control for manual override steering

(2) pairs bent d-rings for balanced lifting

(1) between axle 2 and 3

(1) between axle 4 and 5

Black traction coating on front taper

(2) green SCU indicator lights for axles centered

(1) green indicator light for Dolly centered

(1) green indicator light for Honda motor on

(1) amber strobe indicator light for low steering pressure

AXLES

(2) 25,000 lbs on Jeep

(5) 25,000 lbs on Dolly

60″ axle spacing

16½″ x 7″ brakes

Spring brakes on 1 axle on jeep

Spring brakes on 2 axles on dolly

LIGHTING

12V sealed Grote harness

(1) set of Grote trilliant work light on top of header beam

(1) set of Grote trilliant work light on hat box

PAINT

Black

Air & electric done after paint

AVAILABLE MODELS

XL 130 DGX

XL 180 DGX

WARRANTY

5 year structural

3 year paint