



FEATURES

- 18" loaded deck height with 6" ground clearance
- Micronova clearance lights throughout trailer
- Versatile hauling capabilities
- 48' long overall, 29' long main deck
- New style raise & lower valve
- Front connection plate with three height settings



IMPROVED ADAPTABILITY

The detachable gooseneck features front connection plates with three height settings, allowing for easy adjustment over different terrains. The front main deck has a three-inch variance, adjustable by one and a half inches using the rear raise and lower valve. The Colas+ valve features a large, durable handle for customer convenience.


PRACTICAL DESIGN FEATURES

Practical design elements, such as storage areas at the front of the main deck for stowing chains or other materials, swingout outriggers for hauling over-width loads, and a 2' x 2' cutout in the rear transition for accommodating equipment like drawbars on tractors, make the XL Knight 80 MFG a highly functional and convenient option for users.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

XL 80 MFG KNIGHT SPECS

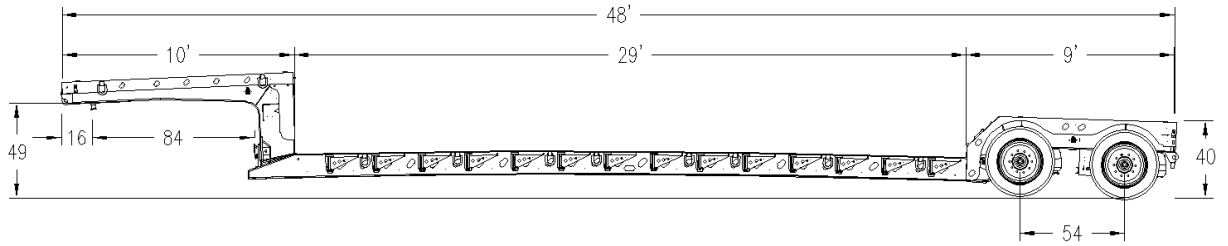

CAPACITY

capacity: 80,000 lb overall
concentrated: 70,000 lb in 16'

OVERALL LENGTH & WIDTH

overall length: 48'
overall width: 102"

GOOSENECK

mechanical detachable full-width
10' long
49" 5th wheel height
84" swing clearance
16" king pin setting
2 bent d-rings per side
2 pan style d-rings per side,
on corners
1 1/8" Apatong decking flush
aluminum mudflaps
toolbox in base w/ lockable
aluminum lid, chain rack, light
2 pair micronova clearance lights
registration holder
3 height setting front connector plate

GOOSENECK OPTIONS

1 pair pull out lights

MAIN DECK

29' long
T-1, 80K web
(4) 12" fabricated i-beams

18" loaded deck height
6" ground clearance
6" & 4" jr. i-beam cross members
on 12" alt. centers
8 bent d-rings per side
1 1/8" apitong decking flush,
center covered
ramp tapers to 4"
(14) 1/2" chain drops per side
removable swing out outrigger
brackets on 24" centers
4 pair of micronova clearance lights

MAIN DECK OPTIONS

swing out outriggers

REAR DECK

9' long
40" deck height
1 1/8" apitong decking flush
2 flag holders
2 stake pockets in tail channel
2 pan style d-ring per side,
on corners
frame reinforcement for flip axle
2 pair of micronova clearance lights
2' x 2' cut out in transition area

REAR DECK OPTIONS

1 pair pull out lights
battery back up with 4-way plug

SUSPENSION

25,000 lb air ride
raise and lower valve
manual ride height control

AXLES

(2) 25,000 lb nominal
54" spacing
hub pilot, outboard drums
4S2M ABS
16 1/2" x 7" brakes
2 pair spring brakes

WHEELS & TIRES

8.25 x 22.5 steel inside, aluminum
polished outside rims
255 / 70R / 22.5 tires

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
3 tail light package with
aluminum cover
4" amber strobe as 3rd tail light

PAINT

black
air & electric done after paint

WARRANTY

5 year structural
3 year paint

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852