



XL GUARDIAN: 110 LOW-PROFILE HDG



FEATURES

- Gooseneck relief cut-out allows truck fenders to clear
- Many securement options: D-rings, chain slots
- Heavy-duty swing out outriggers, double in center
- Heavy-duty front pull out outrigger
- Bucket well and open boom trough
- Trilliant work light in gooseneck
- Bolt-on wheel cover options available



EQUIPMENT-READY MAIN DECK

The trailer's 26-foot-long, 8-foot-6-inch-wide main deck is constructed with a fully welded I-beam design, using 100K flanges and 80K webs, as well as upper-flange reinforcement. The rugged, raised apitong decking is built to last, while a toolbox located in the front provides a place to store chains and other materials.


VERSATILE AXLE CONFIGURATIONS

The Guardian is a 3-axle trailer that can be run by itself or with an added flip axle, a spreader bar and flip, a single-axle power booster or a hydraulic flip axle. XL's new bolt-on recessed hydraulic flip axle option houses the hydraulic cylinder, quickly flipping the axle without the need for a forklift. This allows for better loading clearance over the flip axle and easy swapping between flip axles and boosters.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

XL GUARDIAN: 110 HDG SPECS

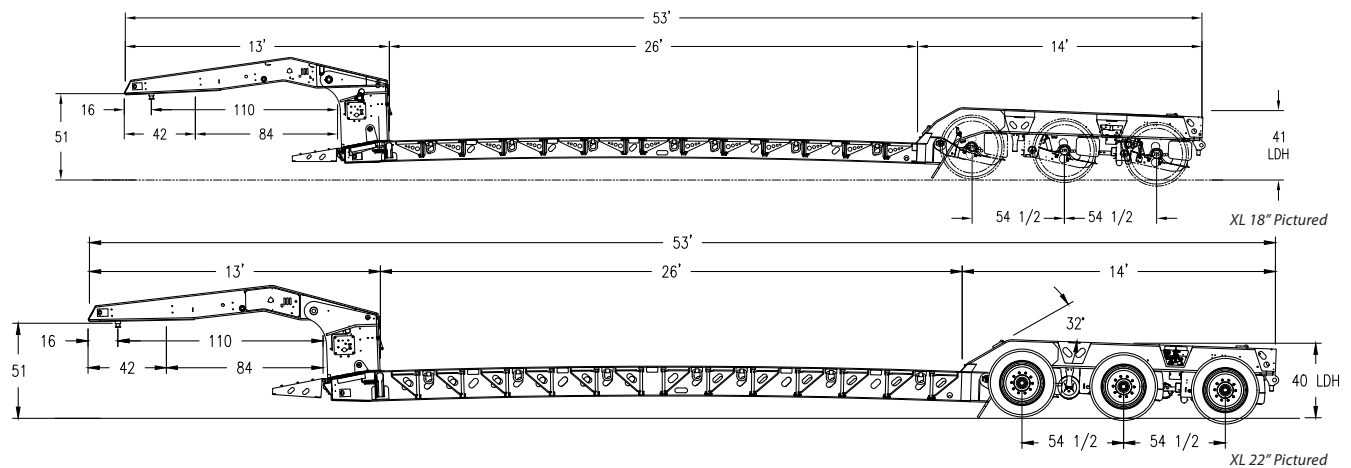

CAPACITY

capacity: 110,000 lb overall
concentrated: 110,000 lb in 12'

OVERALL LENGTH & WIDTH

overall length: 53'
overall width: 102"

GOOSENECK

13' low-profile style neck
with relief cut-out
51" 5th wheel height
5 position variable ride height
110" & 84" swing clearance
16" & 42" king pin setting
hydraulics run off wet kit
air operated lock with manual
safety latch
trilliant work light
toolbox in rear of neck with
aluminum cover

GOOSENECK OPTIONS

13HP power unit, base of neck,
dual hydraulics
chain rack inside toolbox
registration holder

MAIN DECK

26' long
T-1 flange, 80K web
(4) 16" fabricated i-beams
18" loaded deck height or 22" loaded
deck height
6" ground clearance
18" HDG: 8" & 4" jr. i-beams
22" HDG: 10" & 4" jr. i-beams
jr. i-beams on alternating 12" centers
top flange reinforcement
31" front flip ramps
7 bent d-rings per side
1 3/8" Apitong decking - raised,
open center
toolbox in front of deck
4 flat d-rings in toolbox
chain drops on 24" centers
heavy-duty swing out outriggers
on 24" centers, double in center

heavy-duty front pull out outrigger
1 pair EZ mount flag holders
bucket well at rear, plate on bottom
4 flat d-rings in bucket well

MAIN DECK OPTIONS

center deck covered
Oak outrigger planks, 2" x 10"

REAR DECK

14' long with 32° rear transition
18" HDG: 41" loaded deck height
bolsters dropped 4" down
22" HDG: 40" loaded deck height
open wheels - bolster style
open boom trough
air lift on 3rd axle
16 1/2" X 7" brakes
auto slack adjusters
54 1/2" axle spacing
limit chains on all axles
1 pair flat d-rings on main beams at
front
1 pair flat d-rings on main beams at rear
2 pair flat d-rings in boom trough
2 chain drops on each bolster
1 pair EZ mount flag holders
2 stake pockets in tail channel
for wide load sign
prep 1-axle booster
(1) 4-way plug at rear

REAR DECK OPTIONS

prep for power booster
prep for hydraulic flip axle w/ air lock
pins
removable wheel covers heavy-duty,
load bearing
removable wheel covers medium-duty,
non-load bearing
covered boom trough,
bolt-on bottom plate
battery back-up w. 4-way plug for FA
wide load sign

SUSPENSION

25,000 lb air ride
raise and lower valve

manual ride height control
liquid filled air gauge

SUSPENSION OPTIONS

Air-weigh digital scale

AXLES

(3) 25,000 lb nominal
spring brakes on 1 axle
ABS not required

AXLE OPTIONS

hubometer
dust shields
cat eye systems

WHEELS & TIRES

8.25 x 22.5 steel rims
255 / 70R / 22.5 tires
hub pilot, outboard drums

WHEEL & TIRE OPTIONS

aluminum milled wheels
aluminum polished wheels

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
3 tail light package with
aluminum cover
4" amber strobe as 3rd tail light
4 clearance lights per side
1 at rear, 1 at front, 2 on main deck
1 mid-turn light per side
7 pole electric socket

PAINT

black, IH red, CAT yellow or white
air & electric done after paint

WARRANTY

5 year structural
3 year paint
1 year paint

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852